



Model #

# 193Wb Portland Pedestal Base

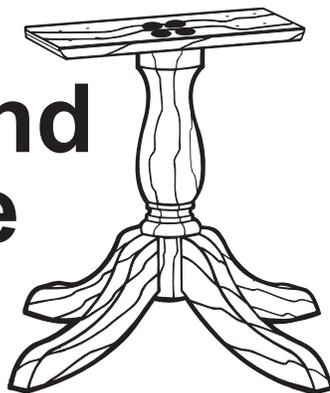

Create  
A Table

TOP SOLD  
SEPARATELY

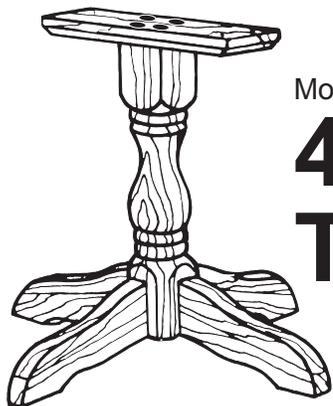

Model #

# 403Wb Large Traditional Table Base

*Assembly Instructions*

## **Congratulations!**

*This fine piece of furniture will make a gorgeous addition to your home. For the best results, read the Assembly Instructions and Finishing Hints before you begin your project.*

## **IMPORTANT NOTES:**

- For normal household use only. **Not** recommended for commercial use.
- Do not climb, sit or stand on this piece of furniture.
- Before you begin your project, completely read the Assembly Instructions and Finishing Hints.
- Store this item: 1- in its box; 2- in a dry place; 3- in temperatures that range from 40° to 90° (not on a cold and possibly damp cement floor).
- Periodically inspect your furniture for any loose glue joints, screws or any other problem that might affect the stability of your furniture. Tighten or repair as needed.

**DESIGN SUBJECT TO CHANGE WITHOUT NOTICE.**



**CALL US FIRST!** *Do not return this item to the store.*

**Service Policy:** We will replace any part that is defective, missing or damaged during assembly. Please contact Whittier Wood Products customer service department directly by phone, fax, mail or email for a replacement part.

**Hours:** Our friendly customer service staff can be reached Monday-Friday 7:00 a.m. to 5:00 p.m. (Pacific Time). You may leave a message 24 hours a day, seven days a week.

**To Order:** Provide the furniture model number (upper left corner of this page), the part letter, production code, quantity needed, reason for replacement, your full name, address and telephone number.

*Parts ship from our Eugene, Oregon factory within one or two business days from the time we receive your request. Please allow five to ten business days for delivery.*

**800-653-3336** • Outside the U.S. or Canada: 541-687-0213 • Fax: 541-687-2060  
www.whittierwood.com • P.O. Box 2827 • Eugene, Oregon 97402, U.S.A.

Whittier  
Wood  
FURNITURE

P.O. Box 2827  
Eugene, OR 97402 USA

Production Code:

VN


01/10

# 193Wb and 403Wb Pedestal Base — Parts List


## Before you begin this assembly:

Please identify the parts and check that quantities received match those on this list.  
If you need to replace a part, refer to the following letter and model name.


### 193Wb

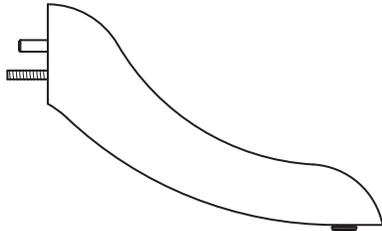

Ab — Foot — Qty. 4




B — Pedestal — Qty. 1

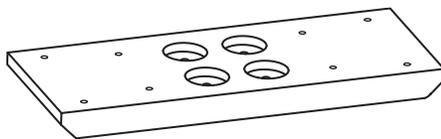


C — Top Support — Qty. 1


### 403Wb

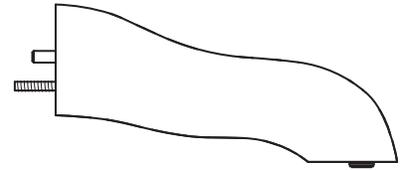

Ab — Foot — Qty. 4




B — Pedestal — Qty. 1

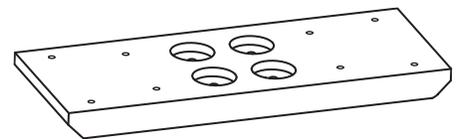

C — Top Support — Qty. 1

## Hardware



D — #12 x 2" Pan  
Head Screw — Qty. 8



E — 5/16" x 3" Lag Bolt  
— Qty. 4




F — Flat Washer —  
Qty. 4



M — 1/2" x 2 1/4" Wood Dowel — Qty. 4  
(inserted)



G — 3/8" x 4 1/2" Hanger Bolt — Qty. 4  
(inserted)



H — Curved Washer  
— Qty. 4



I — 3/8" Nut — Qty. 4

N — Insert Nut — Qty. 4  
(inserted)

L — Adjustable Glide  
— Qty. 4 (inserted)

# 193Wb and 403Wb Pedestal Base Assembly Instructions

**Tools Required:** Phillips Screwdriver, 5/32" Drill Bit, Drill, Adjustable Wrench, Hammer, Wood Glue


*To make this assembly easier and eliminate the need to drill pilot holes,  
use a Phillips bit on a variable speed drill.*

**We recommend that you finish the top and pedestal before you assemble your table.**

**NOTE:** Rub a little bit of soap on the threads of the Lag Bolts to help them screw in more easily.


1. Spread a thin layer of glue on top of the Pedestal (B) before you attach the Top Support (C). Start all four 5/16" x 3" Lag Bolts (E) and Flat Washers (F) into the Pedestal as shown in Figure 1.

Firmly tighten the bolts, but take care not to over-tighten. Over-tightening can strip the wood in the Pedestal. If that happens, spread glue on a small wedge of wood or a wood matchstick and pound it into the stripped hole. Allow it to dry several hours and then solidly tighten the bolts.

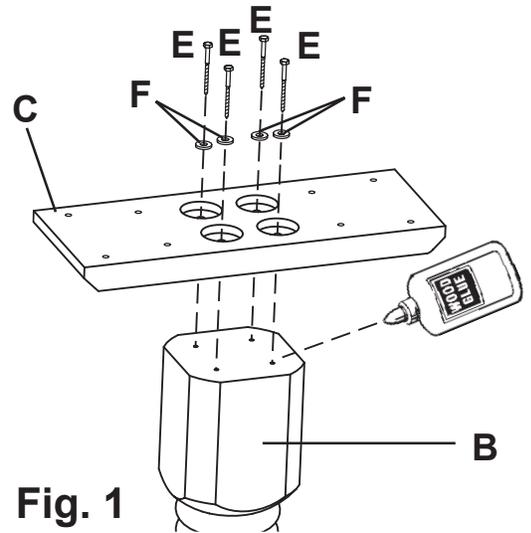


**Fig. 1**

**Fig. 2**

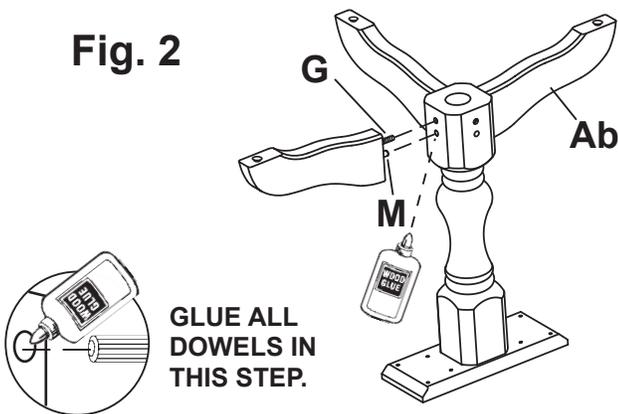


**Fig. 2a**

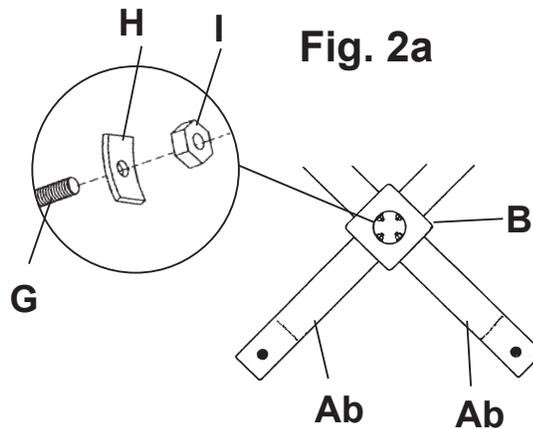

2. Spread a thin layer of glue in an upper hole in the pedestal and place the Dowel (M) into that hole and the Hanger Bolt (G) through the lower hole. Quickly wipe away any excess glue with a damp rag. Insert a Curved Washer (H) and 3/8" Hex Nut (I) over the Hanger Bolt and tighten firmly. See Figures 2 and 2a. Repeat for all feet.

3. Place the top face-down on a clean, protected surface. Center the base on the Top. To prevent possible warping, **MAKE SURE** the direction of the wood grain in the Top Support (C) is placed at a right angle (opposite) to the direction of the wood grain on the table top. See Figure 3.

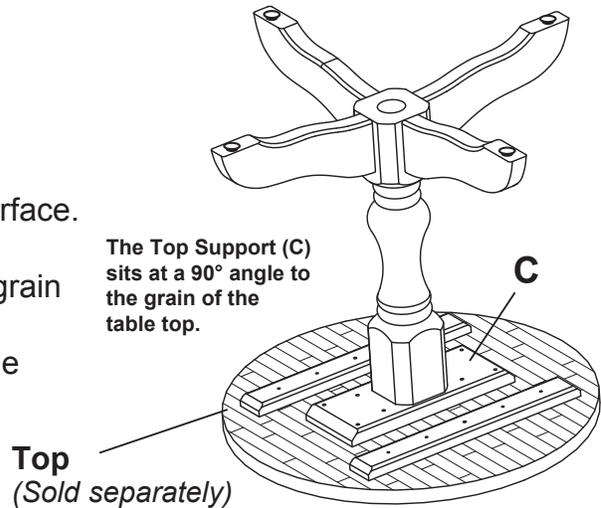

**Fig. 3**

---

**NOTE: To help the screws go in more easily, rub a little bit of soap on to the threads of the #12x2" Pan Head Screws (D).**

4. Place eight #12x2" Pan Head Screws (D) into the holes of the Top Support (C) and tap them lightly with a hammer to center punch or mark the screw locations on the bottom side of the table top. Move the table base away and, using a 5/32" or smaller bit, drill the eight pilot holes you marked in Step 4. Drill the holes 3/4" deep. To prevent drilling through the table top, wrap a piece of tape 3/4" away from the tip. **NOTE: Use a drill and a Phillips bit to speed assembly and eliminate the need to drill pilot holes.**
5. Place the table base back into position and the solidly tighten eight 12x2" Pan Head Screws (D) into the table top.
6. Turn the table upright. When you have placed the table where you want it positioned, rotate the adjustable glides to level the unit.

# Finishing Hints

## Choosing the Finish:

1. Choose a finish that will meet your expectations for the product you are finishing. Are you matching existing furniture or do you want a “natural” finish? Is the piece to be functional, decorative or both? The answers to these questions may affect the type of finish you choose.
2. Use products of the same brand to ensure compatibility of products.
3. **ALWAYS** follow the stain manufacturer’s instructions. Alder is a porous hardwood and often looks best when following the finishing directions for softwoods.
4. We recommend using a wood conditioner under oil base stains.
5. Work in a well ventilated and well lit area.

---

## Getting Started:

1. **Assembly Instructions may contain special finishing information for that item.** Read both the Assembly Instructions and these Finishing Hints completely before beginning.
2. Sand the entire piece, using #220 grit sandpaper. Sand with the grain of the wood on flat surfaces and opposite the grain on turnings. Some parts are plywood. Be careful not to sand through the veneer. End grain (table top ends, seat edges, grooves on turnings, etc.) accepts more stain. Extra sanding in these areas with a #320 grit sandpaper will reduce stain absorption, creating a more evenly stained piece.
3. When sanding is completed, wipe the surface of your furniture with a cloth or tack rag. Make sure the item is free of dust before proceeding.
4. For most products, we recommend preparing and staining the wood prior to assembly. Due to the assembly procedures for chairs, rockers and stools, we recommend assembling these items prior to finishing.
5. If you do choose to finish chairs, rockers or stools prior to assembly, it is **imperative** that you protect the ends of dowels and spindles, and the mortise holes where the wood is joined, from finishing products. Use masking tape around the ends, being careful to cover only the section that will be inserted (remove the tape after the finish has dried and before the furniture is assembled). Wood glue **will not bond** if finishing products are present. If you do get finishing product in these areas, it must be removed to ensure proper bonding.
6. If glue is used in assembly of your furniture, remove any excess glue spots or drips before finishing. Wood surfaces with glue **WILL NOT** accept stains, and will leave a light spot. To remove glue, wipe off as much as possible while wet, then lightly sand the surface until the remaining glue is removed.

## Basic Equipment:

- Rubber gloves
  - Rags
  - Paper towels
  - Q-tips
  - Tack cloth
  - Drop cloth
  - Paint brushes  
(bristle and foam)
  - #220 & #320  
sandpaper
  - Mineral spirits
  - Masking Tape
- 

---

## Gluing Hints:

***These are general hints. Refer to the instruction sheet for detailed information on gluing your specific product. Your unit may not need glue.***

1. We **strongly** recommend that you first lay out all the parts and familiarize yourself with how they fit together before assembling with glue. Glue will set up quickly and can cause damage to the parts if you try to reposition any that have been assembled incorrectly.
2. Glue usually takes several hours to cure (or harden) but it will sometimes set up, or grab, in several seconds. Therefore, once you begin final assembly, be sure to proceed quickly and diligently.

### **Gluing Hints (cont.)**

3. We recommend that you use a good wood glue, such as **Elmer's Wood Glue** or **White Glue, Titebond Wood Glue** or the equivalent; unless the instructions call for a special type such as a slow drying epoxy glue. Carefully read the glue manufacturer's label and follow all instructions.
4. Be sure the holes are clear of any dust so the glue will have a clean surface to adhere to. Blowing in the holes before gluing is recommended, **but be sure to protect your eyes.**
5. **Avoid getting glue on surfaces to be finished!** Most stains or finishes will not penetrate where glue has been spilled. Wet glue can be wiped off with a damp cloth. Follow with a light sanding of the area to ensure a proper finish.
6. **Do not over glue!** It is important to apply an even coat inside all holes and slots. Use a small dowel or pencil to spread glue evenly around the inside of the holes. Because of the fit of the spindles or dowels in the holes, the spindle or dowel pushes glue to the bottom of the hole. If too much glue is used, it will fill the hole and not allow the spindle or dowel to go all the way in.

---

### **Staining:**

1. Read and follow label directions. Stir stain well before starting.
2. Test stain on an inconspicuous spot on your project, or use the sample chip if one is provided. The sample chip must be sanded in the same way as your furniture kit to ensure the piece will accept the stain similarly. Put at least one coat of your top coat over the stain sample, as it also affects the look of the stain. **Test every type of wood that is in your kit.** Some of our products include more than one type of wood, which may react differently to the stain color. Sample chips for the different woods may be included. It may be necessary to add a second coat of stain to lighter woods to match the darker woods in your kit.
3. Apply stain with a poly brush or lint-free cloth. Apply stain over a small area and wipe off excess. Working in small areas will make the color easier to control.
4. Q-tips are ideal for hard to reach areas.
5. Allow to dry thoroughly before proceeding.

---

### **Applying the Top Coat:**

***No top coat is required if using paint.***

1. **Always read and follow all label directions.** Stir your finish coat gently, **do not shake.** It will create bubbles that are hard to remove.
2. **All surfaces** (including the underside of table tops and inside drawers) **must be sealed with at least one layer of a top coat.** This will help minimize wood swelling, shrinkage, warping and cupping due to changes in moisture content or temperature.
3. We recommend that you **apply a minimum of two coats when using polyurethane or varnish (especially on all table top and work surfaces).** Sand lightly between coats using a #320 grit sandpaper or 00 steel wool for the smoothest possible finish.
4. Some water-based finishes tend to raise the grain slightly. This can be easily controlled with this sanding step. However, do not use steel wool when using water-based finishes. Strands of steel fiber caught in the wood can cause rust spots when coated with any water-based product.

---

### **Painting:**

1. For best results when painting, first coat the wood with a primer. An oil based primer would be best for a smooth finish. If you do not wish to use a solvent based primer, a water based primer would work almost as well.
2. Buy a quality brand paint. You may use a satin, semi-gloss, or gloss sheen. Apply a second coat for a smooth finish. Lightly sand between coats using a #320 grit sandpaper, so that the second coat will bond well. Repeat as desired.
3. Since there is such a variation between paint manufacturers, refer to your paint supplier for specific advice on using the paint that you purchase.